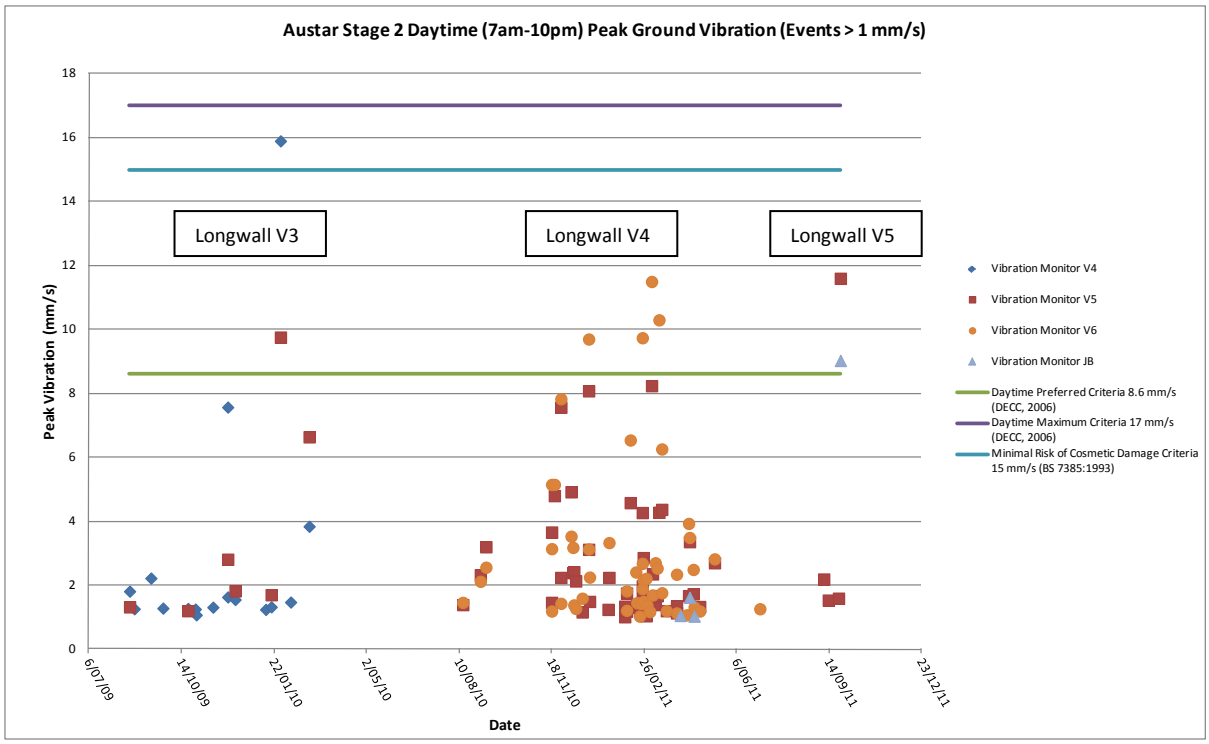
Austar Stage 2 Daytime (7am-10pm) Peak Ground Vibration (Events > 1 mm/s)
Longwall V3
Longwall V4
Longwall V5
Peak Vibration (mm/s)
Date
Vibration Monitor V4
Vibration Monitor V5
Vibration Monitor V6
Vibration Monitor JB
Daytime Preferred Criteria 8.6 mm/s (DECC, 2006)
Daytime Maximum Criteria 17 mm/s (DECC, 2006)
Minimal Risk of Cosmetic Damage Criteria 15 mm/s (BS 7385:1993)

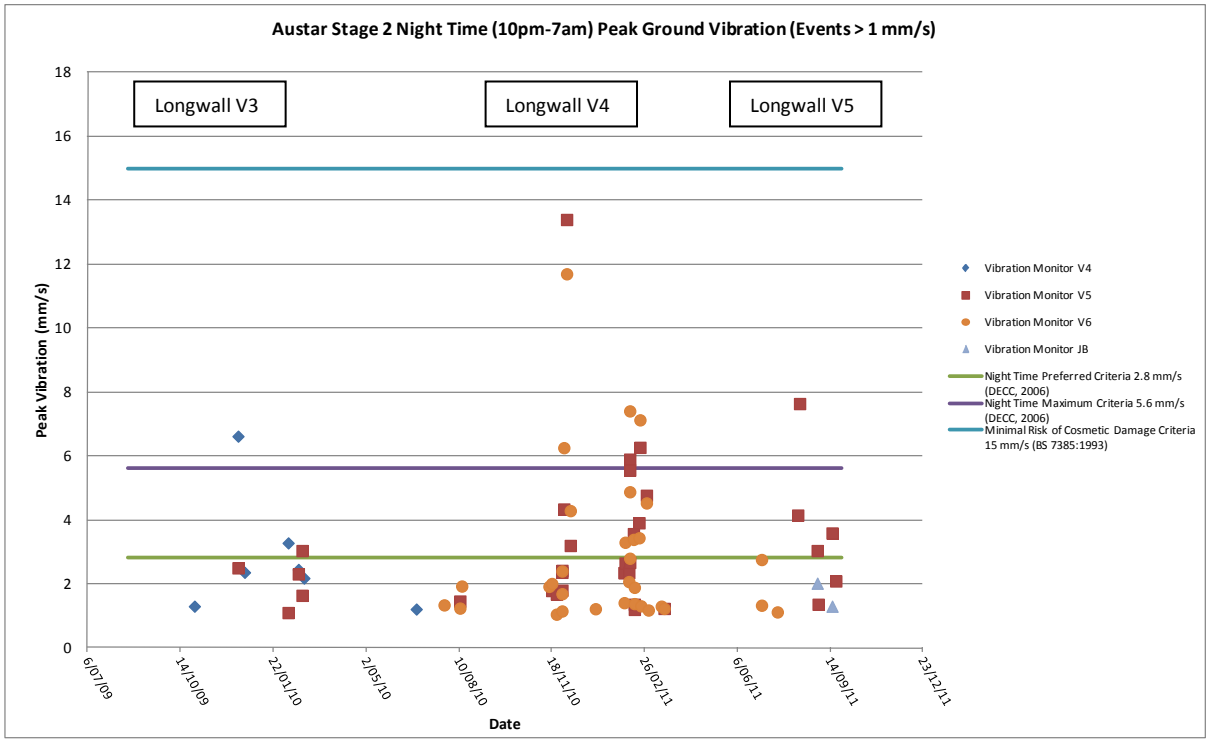
Austar Stage 2 Night Time (10pm-7am) Peak Ground Vibration (Events > 1 mm/s)
Longwall V3
Longwall V4
Longwall V5
Peak Vibration (mm/s)
Date
Vibration Monitor V4
Vibration Monitor V5
Vibration Monitor V6
Vibration Monitor JB
Night Time Preferred Criteria 2.8 mm/s (DECC, 2006)
Night Time Maximum Criteria 5.6 mm/s (DECC, 2006)
Minimal Risk of Cosmetic Damage Criteria 15 mm/s (BS 7385:1993)